

TYPE 9233-50-TS-50-N


LINE IMPEDANCE STABILIZATION NETWORK



Specifications:

CURRENT RATING	50 Amperes
INDUCTANCE	50 uH
FREQUENCY RANGE (recommended)	10 kHz - 50 MHz
VOLTAGE (line to ground)	270 V., 50 - 60 Hz, 130 V., 400 Hz
POWER CONNECTIONS	"TS", 1/4-20 threaded stud
RF CONNECTOR	Type "N"
COUPLING CAPACITOR	0.25 uF
CIRCUIT	Single
CASE SIZE	10.06" (25.72cm) X 9.0" (22.86cm) X 13.12" (33.34cm)

REMARKS: Designed for MIL-STD-461D, VDE 0876 and CISPR PUB 16 (150 kHz - 30 MHz)

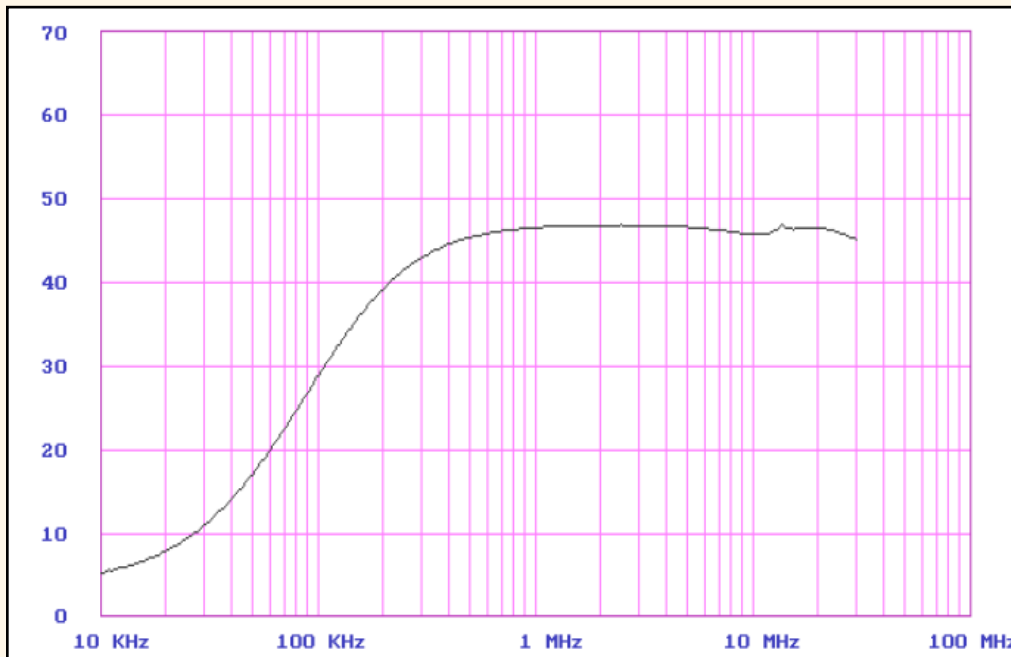

Typical Impedance in a 50 ohm system.

