

High-Power Wideband Monocone

500 – 6000 MHz

Product Code: MONO-A0064

VERSION: 1.2



SPECIFICATIONS:

Product codes:	
MONO-A0064	500 – 6000 MHz N(f) connector
Electrical:	
Frequency range	500 – 6000 MHz
VSWR	< 2.5:1 (see graph)
Power handling (Continuous power, CW excitation)	200 W
Gain	See graph
Elevation 3 dB beamwidth	> 30°
Azimuth ripple	< 1 dB
Nominal input impedance	50 Ω
Polarisation	Vertical
Connector	N-type female
Ground plane requirements	Ground plane dependent, minimum Ø300 mm recommended
Mechanical:	
Height	160 mm
Base diameter	135 mm
Weight	0.95 kg
Mounting base	NATO flange 4 and 6 holes
Environmental:	
Wind loading	160 km/h
Temperature (operational)	- 30 °C to + 65 °C (no icing)
Shock	20 G at 10 msec
Thermal shock	- 20 °C to +70 °C: 10 cycles
Water ingress rating	IP 65 (NEMA 4X)

FEATURES:

- Wide frequency coverage (500 to 6000 MHz)
- High-power, 200 W at 100% duty cycle
- Omni-directional azimuth pattern
- Rugged and hard-wearing
- Suited to low-profile applications

APPLICATIONS:

- Improved explosive device (IED) suppression
- Communications jamming

PRODUCT DESCRIPTION:

The MONO-A0064 is a high-power wideband monocone-type antenna designed for jamming applications in the 500 to 6000 MHz frequency band.

The antenna has a consistently low VSWR across the entire frequency band. It can handle full rated power continuously at all frequencies, making it ideal for all 100% duty-cycle applications.

The antenna is designed for low profile mounting to a vehicular platform and its high strength housing is impervious to shocks, vibration and solvents.


High-Power Wideband Monocone

500 – 6000 MHz


Product Code: MONO-A0064

VERSION: 1.2


GAIN:

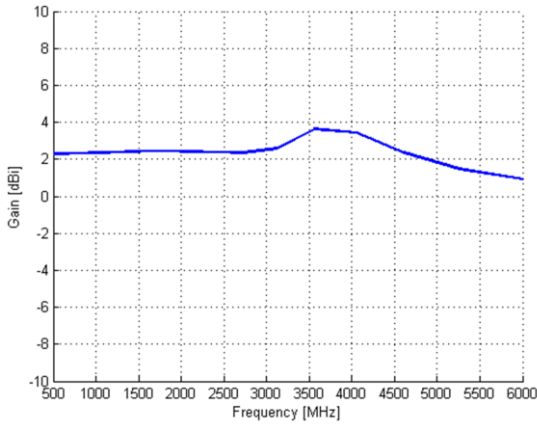

VSWR:

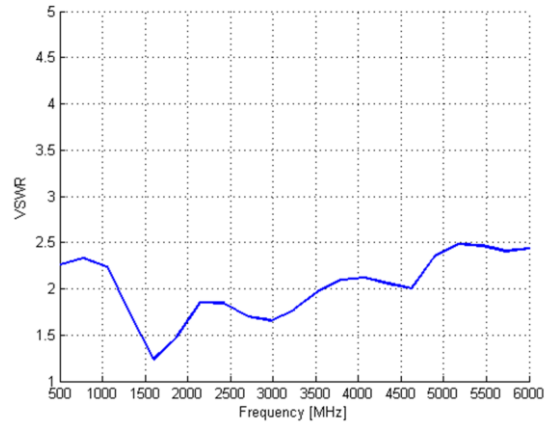

ELEVATION PATTERN

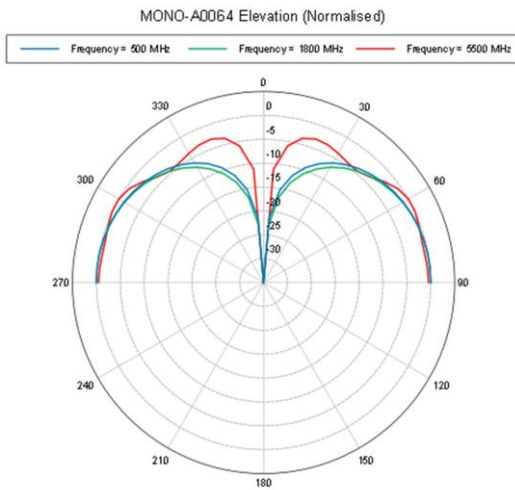

MECHANICAL DRAWINGS

