

Wideband Manpack Antenna

500 – 4000 MHz

Product Code: OMNI-A0083

VERSION: 4.2

SPECIFICATIONS:

Electrical:	
Frequency range	500 – 4000 MHz
VSWR	< 3:1 (500 – 800 MHz) < 2.5 : 1 (800 – 3000 MHz)
Nominal input impedance	50 Ω
Connector	N-type male
Feed power handling	50 W
Gain (at the horizon)	2 dBi (maximum) -6 dBi (minimum)
Polarisation	Linear
Mechanical:	
Dimensions (l x d)	275 mm x 55 mm
Weight	< 380 g
Environmental:	
Wind survival	160 km/h
Temperature (operational)	- 30 °C to + 65 °C (no icing)
Shock	40 G for 10 ms
Thermal shock	- 20 °C to + 70 °C: 10 cycles



PRODUCT FEATURES:

- Wide frequency coverage (500 to 4000 MHz)
- High-power, 50 W at 100% duty cycle
- Good VSWR (less than 2.5:1 over 90% of the band)
- Omni-directional azimuth pattern
- Rugged and waterproof

APPLICATIONS:

- Improvised explosive device (IED) Suppression
- Communications jamming

PRODUCT DESCRIPTION:

The OMNI-A0083 is a high-power, omni-directional, wideband, manpack antenna designed for jamming applications between 500 to 4000 MHz.



sales@poynting.co.za
www.poynting.co.za

Poynting Antennas has a policy of continuous improvement and hence specifications may change without notice

DEFENCE AND SPECIALISED

Wideband Manpack Antenna


500 – 4000 MHz

Product Code: OMNI-A0083

VERSION: 4.2

VSWR AND GAIN GRAPHS:

VSWR

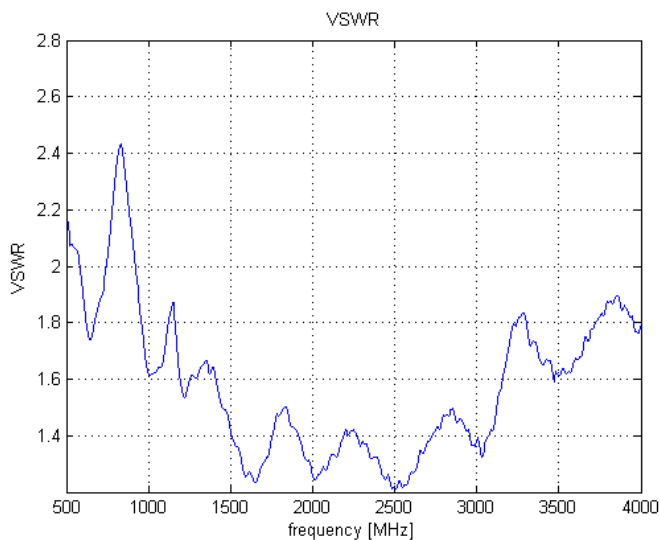

GAIN

