

Vehicle Mount Jamming Antenna

500 – 800 MHz

Product Code: OMNI-A0162

VERSION: 1.1

SPECIFICATIONS:

Electrical	
Frequency range	500 – 800 MHz
Gain	4 dBi typical
Azimuth pattern	Omni
Elevation pattern	Narrow beam (see graph)
Polarisation	Vertical
Nominal impedance	50 Ω
VSWR	< 2.5:1 or better
Power handling	50 W CW
Connector	N-type female at base
Ground plane required	No
Mechanical	
Dimensions (L x D)	1100 mm x 50 mm
Base diameter	135 mm
Total mass	< 2 kg
Mounting	NATO base flange, 4 and 6 holes
Colour	Black, others on request
Environmental	
Temperature range	Storage: -41 °C to +71 °C Operation -31 °C to +55 °C
Weatherproofing	IP 67 water resistant (when flange is mounted)
Shock and vibration	MIL-STD-810E 516.4: Vibration category 8, shock 40 g
Exposed materials	Painted e-glass Anodized aluminium Stainless steel



PRODUCT FEATURES:

- High gain jamming antenna
- Proven flexible base spring protects the antenna
- High-power – 50 at 100% duty cycle
- Rugged and waterproof
- VSWR < 2.5:1
- Ground plane independent

PRODUCT OVERVIEW:

The OMNI-A0162 is a high gain, high-powered, omni-directional antenna designed for jamming purposes. It is mounted on a 4/6 hole base flange, with a spring for shock absorption and flexibility for vehicular mounting. An e-glass tube contains the antenna RF radiator.

The antenna is based on a collinear dipole-type design and is therefore ground plane independent.



sales@poynting.co.za
www.poynting.co.za

Poynting Antennas has a policy of continuous improvement and hence specifications may change without notice

DEFENCE AND SPECIALISED

Vehicle Mount Jamming Antenna


500 – 800 MHz

Product Code: OMNI-A0162


VERSION: 1.1

VSWR and gain graphs:

Typical VSWR

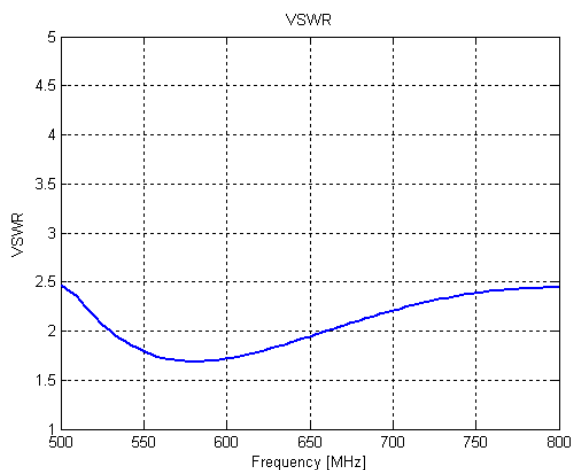

GAIN

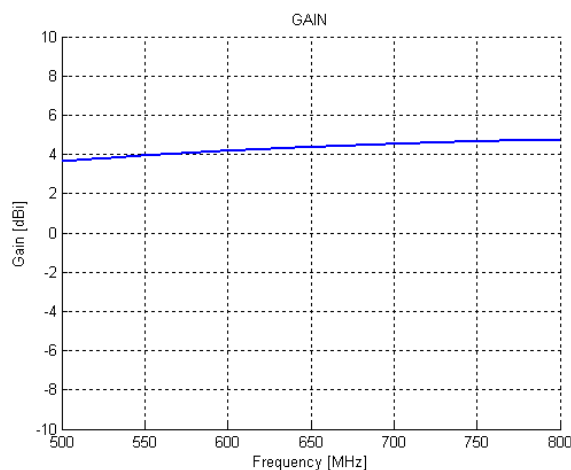

Elevation Patterns

