

Wideband VHF/UHF Vehicle Antenna

100 – 520 MHz

Product Code: OMNI-A0081

VERSION: 5.0

SPECIFICATIONS:



Electrical:	
Frequency range	100 – 520 MHz
VSWR	< 2.5:1
Nominal input impedance	50 Ω
Feed power handling	200 W
Connector	N-type female
Gain:	0dBi (±2dB) typical
(on horizon over large ground plane):	See graph
E-plane 3 dB beamwidth	40° (± 10°)
Polarisation	Vertical
Ground plane	Required (3000 mm x 3000 mm recommended)
Mechanical:	
Height	500 mm
Diameter	Base 135 mm, radiator 25 mm
Weight	4 kg
Mounting base	NATO flange, 6 holes
Environmental:	
Wind survival	160 km/h
Temperature (operational)	- 30 °C to + 51 °C
Temperature (storage)	- 30 °C to + 71 °C
Vibration (ground transportation)	MIL-STD-810E, method 514.5, cat 1
Vibration (operational)	MIL-STD-617-1, type 1
Water ingress rating	MIL-STD-820F (506.4) IP64

PRODUCT FEATURES:

- Wide frequency coverage (100 to 520 MHz)
- High-power, 200 W at 100% duty cycle
- Excellent VSWR (2.5 maximum)
- Omni-directional azimuth pattern
- Rugged and hard-wearing
- Suited to low-profile applications

APPLICATIONS:

- RCIED suppression (force protection)
- Communications jamming

PRODUCT DESCRIPTION:

The OMNI-A0081 is a high-power broadband antenna designed for jamming applications in the 100 to 520 MHz frequency band and recently upgraded for high-power handling and improved gain.

This omni-directional antenna has an excellent radiation pattern, no pattern break-up, and a consistently low VSWR across the entire frequency band. It can handle full rated power continuously at all frequencies, making it ideal for all 100% duty-cycle applications. The anodised aluminium radiator is equipped with spring mounting to allow whip-action and resistance to impacts and obstructions.

The antenna may be used at frequencies as low as 80 MHz if a higher VSWR and lower gain can be tolerated.

The antenna is designed for direct mounting to ground platform with aid of grounding strap provided.



sales@poynting.co.za
www.poynting.co.za

Poynting Antennas has a policy of continuous improvement and hence specifications may change without notice

DEFENCE AND SPECIALISED

Wideband VHF/UHF Vehicle Antenna


100 – 520 MHz

Product Code: OMNI-A0081


VERSION: 5.0

VSWR AND GAIN GRAPHS:

VSWR*

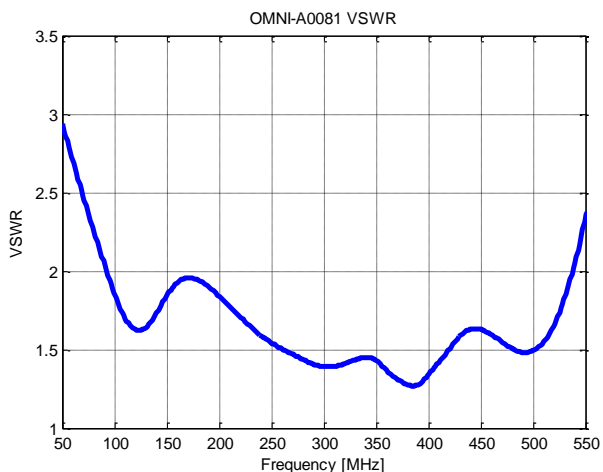


Gain*

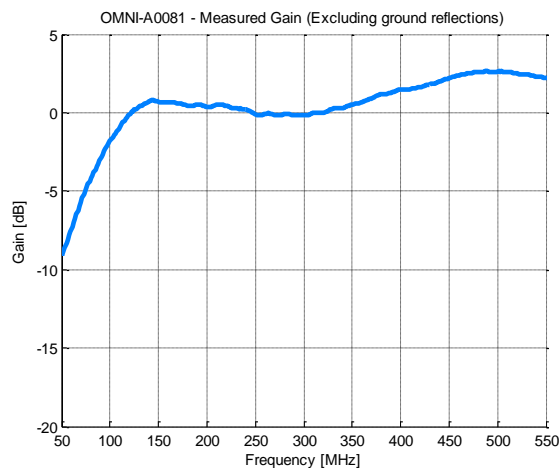

*Measured on ground plane 5000x2500mm

Gain**

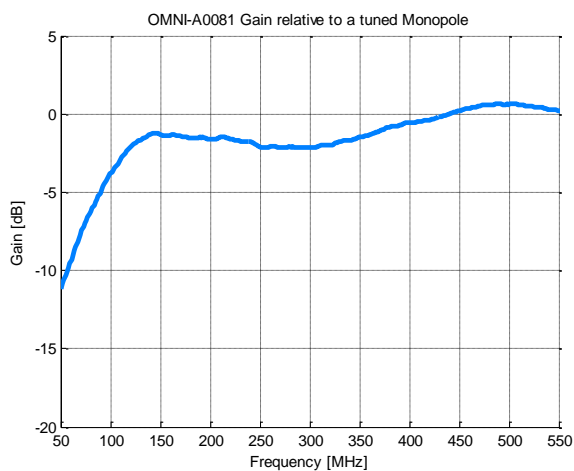

**Relative to a tuned monopole, measured on a ground plane 5000 mm x 2500 mm




Wideband VHF/UHF Vehicle Antenna

100 – 520 MHz

Product Code: OMNI-A0081

VERSION: 5.0

ELEVATION PATTERNS***

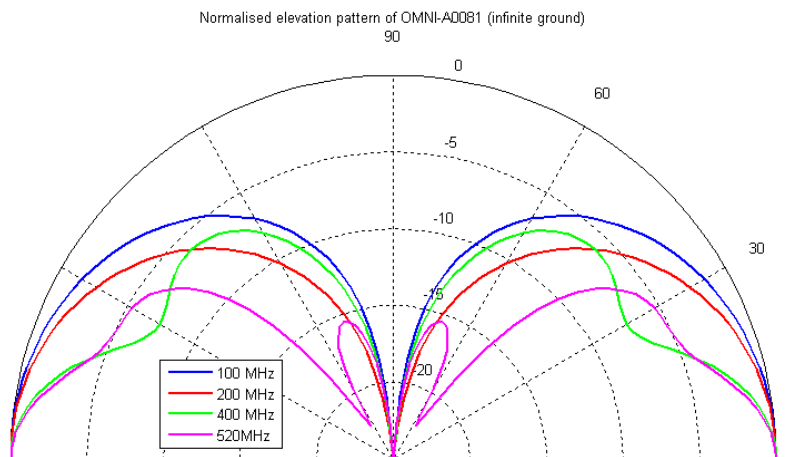

***On infinite ground plane

MECHANICAL INTERFACE DRAWINGS

