


Wideband Vehicle Mount Antenna

500 – 4000 MHz

Product Code: OMNI-A0105

VERSION: 4.2

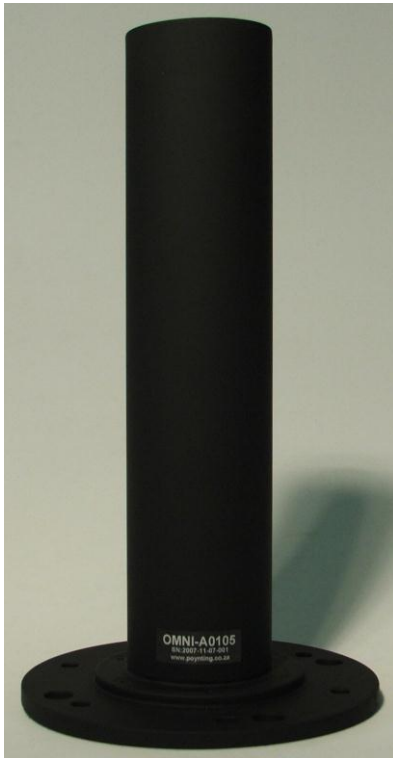

SPECIFICATIONS:

Electrical:	
Frequency range	500 – 4000 MHz
VSWR	< 3.5:1 (500 – 800 MHz) < 2.5:1 (800 – 4000 MHz)
Nominal input impedance	50 Ω
Connector	N-type female
Feed power handling	50 W
Gain (at the horizon)	- 6 dBi (minimum) + 2 dBi (maximum)
Polarisation	Linear
Mechanical:	
Dimensions (l x d)	265 mm x 55 mm (radome) x 135 mm (base)
Weight	< 560 g
Environmental:	
Wind survival	160 km/h
Temperature range	- 30 °C to + 65 °C (no icing)
Shock	20 G for 10 ms
Thermal shock	-20 °C to +70 °C : 10 cycles

PRODUCT FEATURES:

- Wide frequency coverage (500 to 4000 MHz)
- High-power, 50 W at 100% duty cycle
- Good VSWR (less than 2.5:1 over 90% of the operating band)
- Omni-directional azimuth pattern
- Rugged and waterproof

PRODUCT DESCRIPTION:

The OMNI-A0105 is a high-power, omni-directional, wideband, vehicle mount antenna designed for jamming applications between 500 to 4000 MHz.

APPLICATIONS:

- Improvised explosive device (IED) Suppression
- Communications jamming



Wideband Vehicle Mount Antenna


500 – 4000 MHz

Product Code: OMNI-A0105

VERSION: 4.2

VSWR AND GAIN GRAPHS:

VSWR

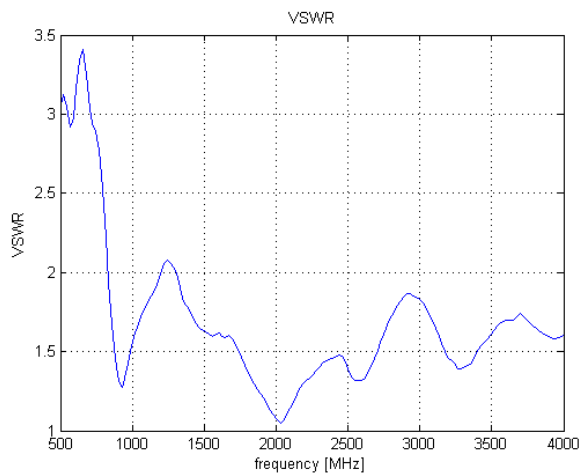

GAIN

